

CBG 1500-2

2V 1500AH

Deep Cycle Gel



CBG1500-2

Awaiting Image

Physical Specification





| | |
|-------------------------------|----------------------------------|
| Part Number: | CBG1500-2 |
| Length: | 403 ± 2 mm (15.87 inches) |
| Width: | 354 ± 2 mm (13.94 inches) |
| Container Height: | 339 ± 2 mm (13.35 inches) |
| Total Height (with terminal): | 349 ± 2 mm (13.74 inches) |
| Approx Weight: | Approx 99.0 kg (218.3lbs) |

Specifications

| | | |
|----------------------------------|---|---|
| | Nominal Voltage | 2V |
| | Nominal Capacity (20HR) | 1500AH |
| Terminal Type | Standard Terminal | T11 |
| | Optional Terminal | - |
| Container Material | Standard Option | ABS |
| | Flame Retardant Option (FR) | ABS (UL94:VO) |
| Rated Capacity | 1600.0 AH/80.0A | (20hr, 1.80V/cell, 25°C / 77°F) |
| | 1500.0 AH/150.00A | (10hr, 1.80V/cell, 25°C / 77°F) |
| | 1290.0 A H/258.0A | (5hr, 1.75V/cell, 25°C / 77°F) |
| | 1122.0 AH/374.0A | (3hr, 1.75V/cell, 25°C / 77°F) |
| | 880.0 AH/880.0A | (1hr, 1.60V/cell, 25°C / 77°F) |
| Max Discharge Current | 10500A (5s) | |
| Internal Resistance | Approx 0.39mΩ | |
| Discharge Characteristics | Operating Temp. Range | Discharge: -20 ~ 55°C (-4 ~ 131°F) |
| | | Charge: 0 ~ 40°C (32 ~ 104°F) |
| | | Storage: -20 ~ 50°C (-4 ~ 122°F) |
| | Nominal Operating Temp. Range | 25 ± 3°C (77 ± 5°F) |
| | Cycle Use | Initial Charging Current less than 375.0A. Voltage 2.4V ~ 2.5V at 25°C (77°F) Temp. Coefficient -5mV/°C |
| | Standby Use | No limit on Initial Charging Current Voltage 2.25V ~ 2.3V at 25°C (77°F) Temp. Coefficient -3mV/°C |
| Capacity affected by Temperature | 40°C (104°F) | 103% |
| | 25°C (77°F) | 100% |
| | 0°C (32°F) | 86% |
| Design Floating Life at 20°C | 15 Years | |
| Self Discharge | Canbat batteries may be stored for up to 6 months at 25°C(°77F) and then a refresh charge is required. For higher temperatures the time interval will be shorter. | |

Dimensions

T11 Terminal



ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE


Constant Current Discharge (Amperes) at 25 °C (77°F)

| F.V/Time | 20min | 30min | 45min | 1h | 2h | 3h | 4h | 5h | 6h | 7h | 8h | 9h | 10h | 20h |
|------------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|
| 1.85V/cell | 1305.0 | 1026.0 | 782.0 | 679.5 | 433.5 | 330.5 | 273.8 | 236.4 | 204.0 | 180.6 | 162.9 | 148.8 | 140.9 | 76.8 |
| 1.80V/cell | 1498.5 | 1146.0 | 864.0 | 750.0 | 469.5 | 354.0 | 290.3 | 248.4 | 214.3 | 189.0 | 170.8 | 156.7 | 147.2 | 80.0 |
| 1.75V/cell | 1683.0 | 1260.0 | 932.0 | 801.0 | 497.3 | 374.0 | 304.1 | 258.0 | 221.8 | 195.9 | 176.3 | 161.3 | 150.0 | 81.6 |
| 1.70V/cell | / | 1350.0 | 990.0 | 849.0 | 527.3 | 389.5 | 313.9 | 265.8 | 229.5 | 202.3 | 181.5 | 165.5 | 153.6 | 82.7 |
| 1.67V/cell | / | 1404.0 | 1026.0 | 880.0 | 540.8 | 402.0 | 321.8 | 271.5 | 233.3 | 205.3 | 184.1 | 167.8 | 155.4 | 83.5 |
| 1.60V/cell | / | 1500.0 | 1102.0 | 934.5 | 562.5 | 418.0 | 333.8 | 279.9 | 239.0 | 209.6 | 187.5 | 171.3 | 158.4 | 84.7 |


Constant Power Discharge (Watts) at 25 °C (77°F)

| F.V/Time | 20min | 30min | 45min | 1h | 2h | 3h | 4h | 5h | 6h | 7h | 8h | 9h | 10h | 20h |
|------------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1.85V/cell | 2478.2 | 1961.7 | 1504.6 | 1312.8 | 840.6 | 642.5 | 534.4 | 463.1 | 401.1 | 356.0 | 321.8 | 294.2 | 278.7 | 152.1 |
| 1.80V/cell | 2808.2 | 2170.5 | 1646.8 | 1441.5 | 905.7 | 685.7 | 564.2 | 484.9 | 419.7 | 371.2 | 336.3 | 308.9 | 290.6 | 158.2 |
| 1.75V/cell | 3118.6 | 2360.0 | 1760.5 | 1531.5 | 956.7 | 722.9 | 589.4 | 501.3 | 432.9 | 383.7 | 346.3 | 317.8 | 296.0 | 161.2 |
| 1.70V/cell | / | 2511.0 | 1863.2 | 1617.3 | 1009.7 | 750.6 | 606.7 | 515.4 | 447.3 | 395.7 | 356.1 | 325.7 | 302.7 | 163.3 |
| 1.67V/cell | / | 2576.3 | 1913.5 | 1663.2 | 1030.1 | 771.4 | 620.0 | 524.5 | 453.2 | 400.3 | 360.3 | 329.5 | 305.8 | 164.6 |
| 1.60V/cell | / | 2734.5 | 2044.2 | 1756.9 | 1066.5 | 798.4 | 641.1 | 539.1 | 462.9 | 407.6 | 366.2 | 335.8 | 311.3 | 166.7 |


Discharge Characteristics

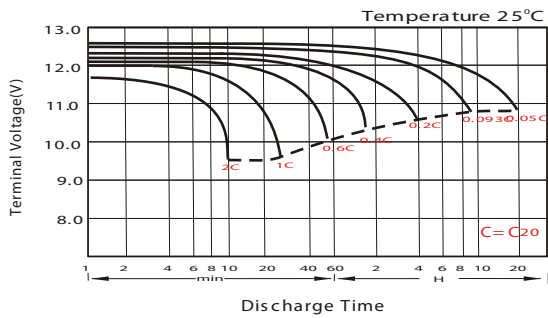


Float Charging Characteristics

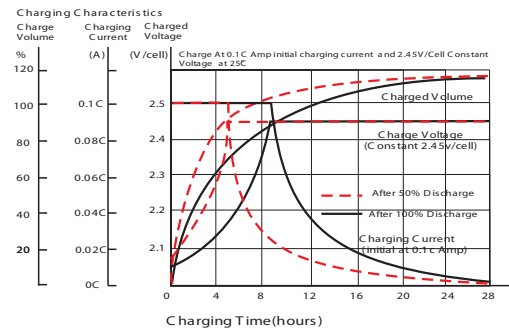


Temperature Effects in Relation to Battery Capacity

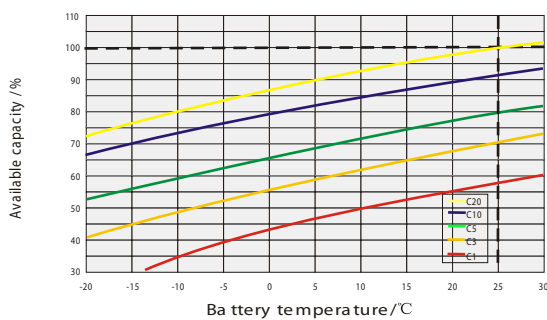


Effect of Temperature on Long Term Float Life

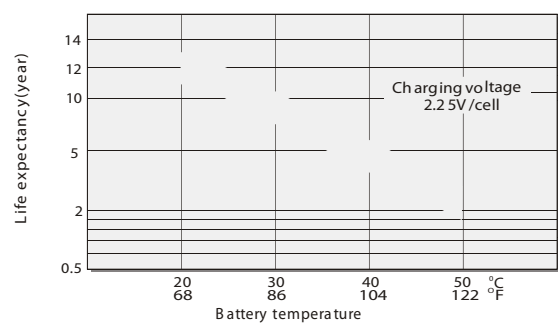

Cycle Life in Relation to Depth of Discharge

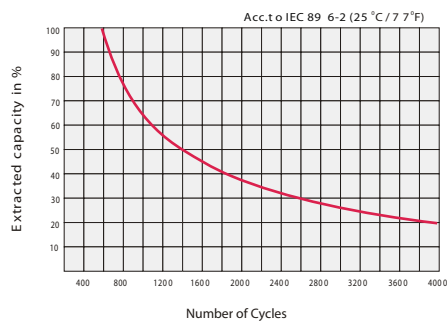

General Relation of Capacity VS. Storage Time

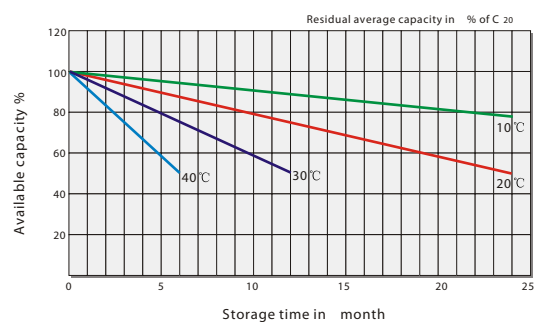

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE