

CBL 0.4-4

4V 0.4AH

General Purpose



CBL 0.4-4

Awaiting Image

Physical Specification


Part Number:	CBL0.4-4
Length:	35 ± 2 mm (1.38 inches)
Width:	22 ± 2 mm (0.87 inches)
Container Height:	40 ± 2 mm (1.57 inches)
Total Height (with terminal):	46 ± 2 mm (1.81 inches)
Approx Weight:	Approx 0.06kg (0.132lbs)

Specifications

	Normal Voltage	4V
	Normal Capacity (20HR)	0.4AH
Terminal Type	Standard Terminal	\
	Optional Terminal	-
Container Material	Standard Option	ABS
	Flame Retardant Option (FR)	UL94:VO
Rated Capacity	0.40 AH/0.02A	(20hr, 1.80V/cell, 25°C / 77°F)
	0.37 AH/0.037A	(10hr, 1.80V/cell, 25°C / 77°F)
	0.34 AH/0.068A	(5hr, 1.75V/cell, 25°C / 77°F)
	0.306 AH/0.102A	(3hr, 1.75V/cell, 25°C / 77°F)
	0.251 AH/0.251A	(1hr, 1.60V/cell, 25°C / 77°F)
Max Discharge Current	6A (5s)	
Internal Resistance	Approx 200mΩ	
Discharge Characteristics	Operating Temp. Range	Discharge: -15 ~ 50°C (5 ~ 122°F)
		Charge: 0 ~ 40°C (5 ~ 104°F)
		Storage: -15 ~ 40°C (5 ~ 104°F)
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)
	Cycle Use	Initial Charging Current less than 0.12A. Voltage 4.8V ~ 5.0V at 25°C (77°F) Temp. Coefficient -10mV/°C
	Standby Use	No limit on Initial Charging Current Voltage 4.5V ~ 4.6V at 25°C (77°F) Temp. Coefficient -6mV/°C
Capacity affected by Temperature	40°C (104°F) 103%	
	25°C (77°F) 100%	
	0°C (32°F) 86%	
Design Floating Life at 20°C	5 Years	
Self Discharge	Canbat batteries may be stored for up to 6 months at 25°C(77F) and then a refresh charge is required. For higher temperatures the time interval will be shorter.	

Dimensions

Terminal

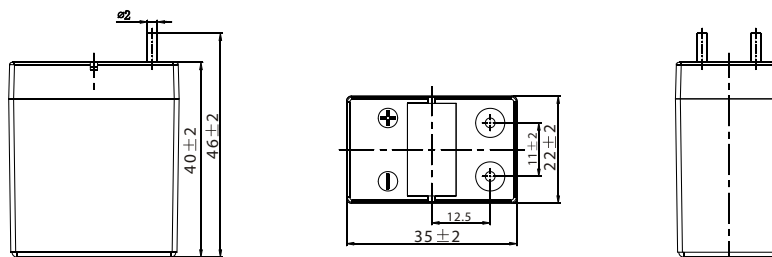

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE


Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	5 min	10 min	15 min	20 min	30 min	45 min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	0.76	0.585	0.485	0.419	0.324	0.239	0.201	0.119	0.093	0.076	0.062	0.054	0.043	0.036	0.020
1.80V/cell	1.02	0.747	0.585	0.495	0.382	0.278	0.225	0.130	0.100	0.081	0.066	0.057	0.046	0.037	0.020
1.75V/cell	1.15	0.821	0.639	0.533	0.397	0.288	0.236	0.135	0.102	0.083	0.068	0.059	0.047	0.038	0.020
1.70V/cell	1.27	0.895	0.683	0.560	0.413	0.300	0.243	0.138	0.105	0.085	0.070	0.060	0.047	0.039	0.021
1.65V/cell	1.40	0.966	0.726	0.595	0.436	0.307	0.249	0.140	0.109	0.088	0.072	0.062	0.048	0.040	0.021
1.60V/cell	1.54	1.049	0.776	0.634	0.460	0.320	0.251	0.146	0.113	0.090	0.074	0.063	0.048	0.040	0.021


Constant Power Discharge (Watts) at 25°C (77°F)

F.V/Time	5 min	10 min	15 min	20 min	30 min	45 min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	1.39	1.08	0.90	0.79	0.617	0.459	0.388	0.231	0.181	0.148	0.121	0.105	0.085	0.071	0.039
1.80V/cell	1.85	1.36	1.08	0.92	0.717	0.529	0.432	0.250	0.194	0.157	0.129	0.112	0.090	0.074	0.040
1.75V/cell	2.04	1.48	1.16	0.98	0.739	0.544	0.450	0.259	0.197	0.160	0.132	0.115	0.092	0.075	0.040
1.70V/cell	2.19	1.57	1.22	1.02	0.765	0.564	0.463	0.265	0.202	0.164	0.135	0.117	0.093	0.077	0.041
1.65V/cell	2.38	1.68	1.29	1.08	0.800	0.573	0.470	0.267	0.210	0.169	0.139	0.120	0.094	0.078	0.041
1.60V/cell	2.56	1.78	1.36	1.14	0.839	0.594	0.472	0.277	0.215	0.174	0.143	0.122	0.095	0.079	0.041


Discharge Characteristics

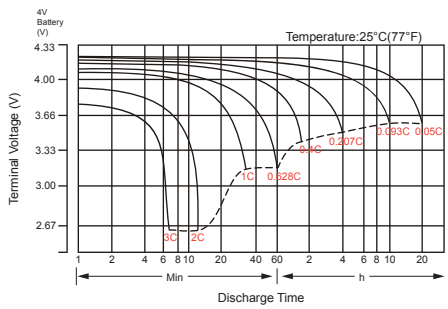


Float Charging Characteristics

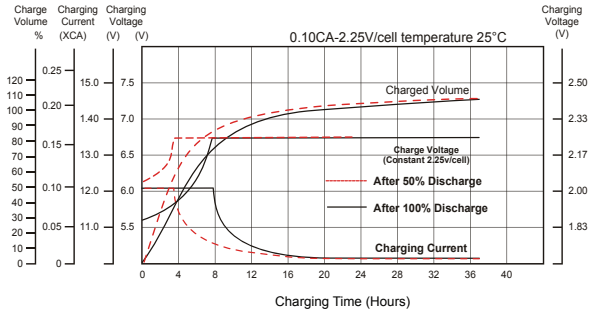


Temperature Effects in Relation to Battery Capacity

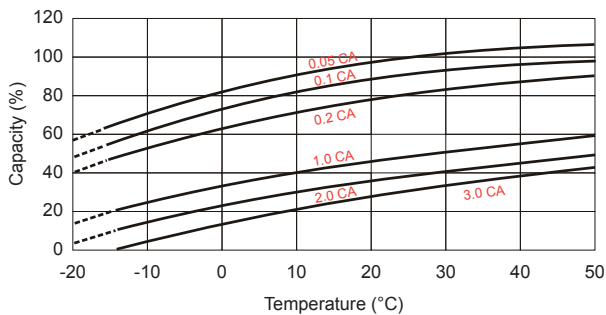


Effect of Temperature on Long Term Float Life

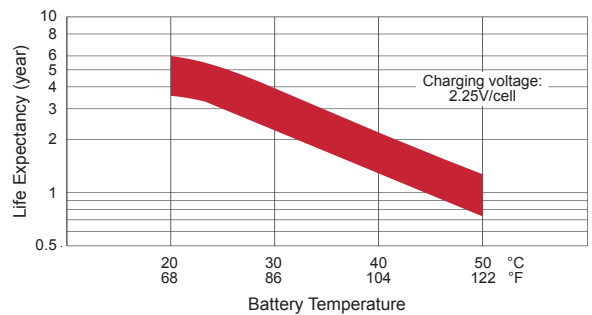

Cycle Life in Relation to Depth of Discharge

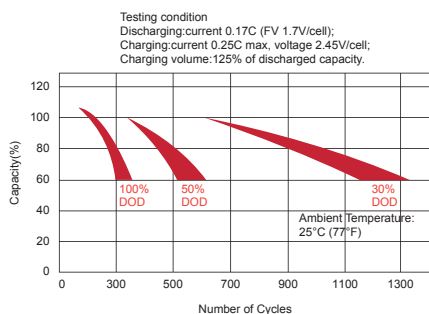

Self Discharge Characteristics

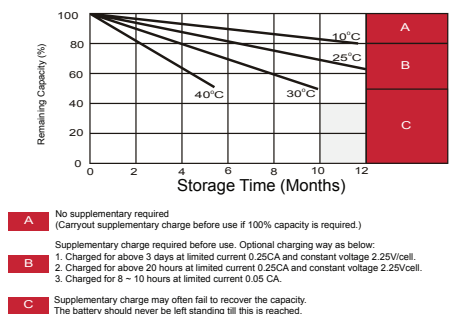

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE