



CBL 1000-2

Awaiting Image

Physical Specification


Part Number:	CBL1000-2
Length:	475 ± 2 mm (18.70 inches)
Width:	175 ± 2 mm (6.89 inches)
Container Height:	328 ± 2 mm (12.91 inches)
Total Height (with terminal):	350 ± 2 mm (13.78 inches)
Approx Weight:	Approx 57.0 kg (125.7 lbs)

Specifications

	Normal Voltage	2V
	Normal Capacity (20HR)	1000AH
Terminal Type	Standard Terminal	T11
	Optional Terminal	-
Container Material	Standard Option	ABS
	Flame Retardant Option (FR)	UL94:VO
Rated Capacity	1050.0 AH/52.50A	(20hr, 1.80V/cell, 25°C / 77°F)
	1000.0 AH/100.0A	(10hr, 1.80V/cell, 25°C / 77°F)
	855.0 AH/171.0A	(5hr, 1.75V/cell, 25°C / 77°F)
	750.0 AH/250.0A	(3hr, 1.75V/cell, 25°C / 77°F)
	600.0 AH/600.0A	(1hr, 1.60V/cell, 25°C / 77°F)
Max Discharge Current	8000A (5s)	
Internal Resistance	Approx 0.45mΩ	
Discharge Characteristics	Operating Temp. Range	Discharge: -15 ~ 50°C (5 ~ 122°F)
		Charge: 0 ~ 40°C (5 ~ 104°F)
		Storage: -15 ~ 40°C (5 ~ 104°F)
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)
	Cycle Use	Initial Charging Current less than 300.0A. Voltage 2.4V ~ 2.5V at 25°C (77°F) Temp. Coefficient -5mV/°C
	Standby Use	No limit on Initial Charging Current Voltage 2.25V ~ 2.3V at 25°C (77°F) Temp. Coefficient -3mV/°C
	Capacity affected by Temperature	40°C (104°F) 103% 25°C (77°F) 100% 0°C (32°F) 86%
Design Floating Life at 20°C	10 Years	
Self Discharge	Canbat batteries may be stored for up to 6 months at 25°C(77F) and then a refresh charge is required. For higher temperatures the time interval will be shorter.	

Dimensions

T11 Terminal

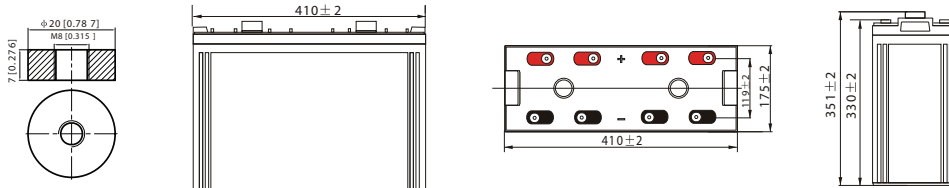

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE


Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	5 min	10 min	15 min	20 min	30 min	45 min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	1166.7	1028.0	903.6	799.9	668.5	543.0	443.2	297.0	227.0	183.0	156.7	137.8	111.8	95.5	50.7
1.80V/cell	1420.0	1203.0	1029.7	896.6	734.5	583.9	472.1	312.5	246.0	189.3	163.0	143.7	117.1	100.0	52.5
1.75V/cell	1659.7	1378.5	1165.0	993.6	799.0	632.1	508.0	331.5	250.0	199.8	171.0	150.5	120.1	102.0	53.2
1.70V/cell	1899.3	1558.3	1287.6	1092.6	868.2	675.2	537.8	350.0	261.0	208.0	177.9	155.8	124.0	104.5	54.3
1.65V/cell	\	1666.0	1369.9	1154.9	909.7	701.8	558.8	361.5	269.3	214.3	182.8	158.7	126.3	106.2	55.2
1.60V/cell	\	1886.7	1539.9	1287.6	995.0	759.1	600.0	379.5	280.7	223.3	191.3	165.7	131.0	109.6	56.9


Constant Power Discharge (Watts) at 25°C (77°F)

F.V/Time	5 min	10 min	15 min	20 min	30 min	45 min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	2144.9	1909.1	1695.1	1515.8	1280.8	1049.1	859.3	579.7	444.8	359.6	308.7	272.4	221.8	189.9	100.8
1.80V/cell	2582.9	2208.1	1905.9	1674.2	1385.9	1119.5	910.5	605.9	479.3	369.9	319.7	282.7	231.7	198.6	104.4
1.75V/cell	2954.9	2489.9	2129.9	1837.6	1495.2	1200.3	975.3	640.4	485.2	389.1	334.2	295.3	237.1	202.3	105.6
1.70V/cell	3288.3	2751.1	2321.5	2005.7	1615.7	1277.4	1029.2	674.7	505.6	404.4	347.2	305.3	244.5	207.1	107.8
1.65V/cell	\	2914.5	2451.1	2104.2	1679.2	1315.8	1061.8	692.9	519.5	415.0	355.5	309.9	248.3	210.2	109.4
1.60V/cell	\	3225.9	2709.8	2320.6	1823.9	1415.8	1134.0	723.9	538.9	431.1	370.8	322.6	257.2	216.5	112.6


Discharge Characteristics

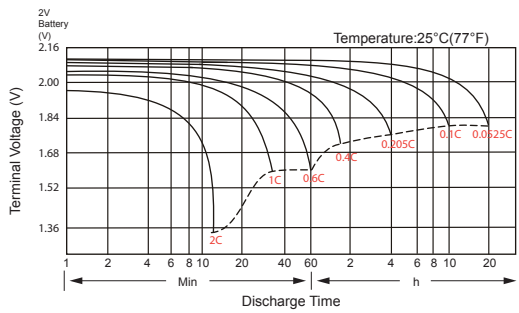


Float Charging Characteristics

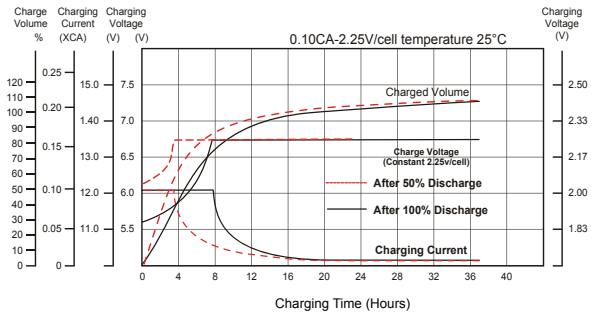


Temperature Effects in Relation to Battery Capacity

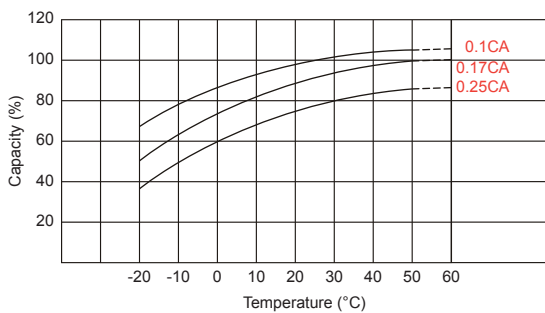


Effect of Temperature on Long Term Float Life

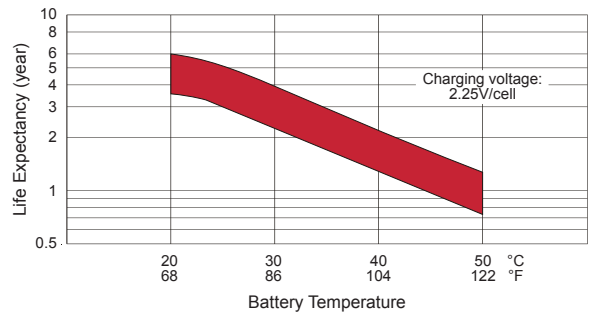

Cycle Life in Relation to Depth of Discharge

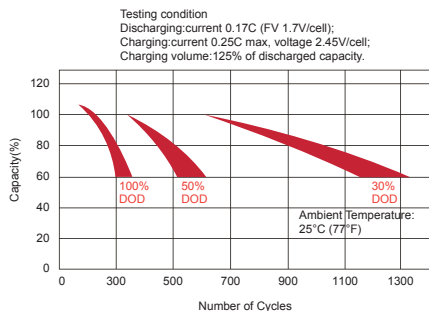

Self Discharge Characteristics

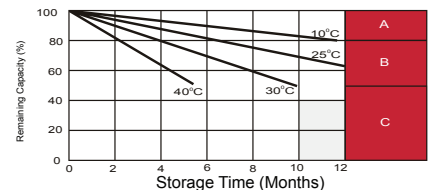

- A** No supplementary required (Carryout supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
 1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.25V/cell.
 3. Charged for 8 - 10 hours at limited current 0.05 CA.
- C** Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this is reached.

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE