

# CBL 30-12T

12V 30AH

General Purpose



## CBL30 -12T

Awaiting Image

## Physical Specification


Part Number:	<b>CBL30-12T</b>
Length:	<b>195 ± 2 mm (7.68 inches)</b>
Width:	<b>130 ± 2 mm (5.12 inches)</b>
Container Height:	<b>164 ± 2 mm (6.46 inches)</b>
Total Height (with terminal):	<b>178 ± 2 mm (7.01 inches)</b>
Approx Weight:	<b>Approx 9.7kg</b>

## Specifications

	Nominal Voltage	12V	
	Nominal Capacity (20HR)	30AH	
Terminal Type	Standard Terminal	T5	
	Optional Terminal	T3 / T2 / T6 / T12	
Container Material	Standard Option	ABS	
	Flame Retardant Option (FR)	ABS (UL94:VO)	
Rated Capacity	30.0 AH/1.50A	(20hr, 1.80V/cell, 25°C / 77°F)	
	27.9 AH/2.79A	(10hr, 1.80V/cell, 25°C / 77°F)	
	25.5 AH/5.10A	(5hr, 1.75V/cell, 25°C / 77°F)	
	22.9 AH/7.65A	(3hr, 1.75V/cell, 25°C / 77°F)	
	18.8AH/18.84A	(1hr, 1.60V/cell, 25°C / 77°F)	
Max Discharge Current	450A (5s)		
Internal Resistance	Approx 13mΩ		
Discharge Characteristics	Operating Temp. Range	Discharge: -15 ~ 50°C (5 ~ 122°F)	
		Charge: 0 ~ 40°C (5 ~ 104°F)	
		Storage: -15 ~ 40°C (5 ~ 104°F)	
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)	
	Cycle Use	Initial Charging Current less than 9.0A. Voltage 14.4V ~ 15.0V at 25°C (77°F) Temp. Coefficient -30mV/°C	
	Standby Use	No limit on Initial Charging Current Voltage 13.5V ~ 13.8V at 25°C (77°F) Temp. Coefficient -20mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%	
	25°C (77°F)	100%	
	0°C (32°F)	86%	
Design Floating Life at 20°C	10 Years		
Self Discharge	Canbat batteries may be stored for up to 6 months at 25°C(77°F) and then a refresh charge is required. For higher temperatures the time interval will be shorter.		

## Dimensions

### T5 Terminal

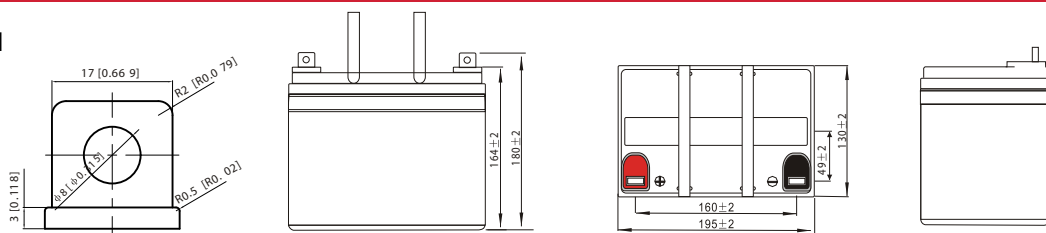

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE


## Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	57.1	43.9	36.3	31.4	24.3	17.90	15.1	8.92	6.98	5.68	4.63	4.02	3.24	2.71	1.49
1.80V/cell	76.7	56.1	43.9	37.1	28.7	20.8	16.9	9.74	7.51	6.06	4.97	4.31	3.44	2.79	1.50
1.75V/cell	86.5	61.6	48.0	40.0	29.8	21.6	17.7	10.1	7.65	6.20	5.10	4.43	3.50	2.87	1.52
1.70V/cell	95.2	67.1	51.2	42.0	31.0	22.5	18.2	10.4	7.86	6.36	5.23	4.52	3.54	2.92	1.54
1.65V/cell	105.0	72.5	54.4	44.6	32.7	23.0	18.7	10.5	8.20	6.58	5.37	4.62	3.60	2.98	1.56
1.60V/cell	115.8	78.7	58.2	47.5	34.5	24.0	18.8	11.0	8.45	6.79	5.55	4.72	3.63	3.02	1.57


## Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	104.5	81.0	67.8	59.2	46.3	34.4	29.1	17.3	13.6	11.1	9.08	7.90	6.39	5.36	2.94
1.80V/cell	138.7	102.3	80.8	69.0	53.8	39.7	32.4	18.8	14.6	11.8	9.69	8.44	6.76	5.51	2.97
1.75V/cell	153.1	110.6	87.2	73.5	55.4	40.8	33.8	19.4	14.8	12.0	9.92	8.64	6.86	5.65	2.99
1.70V/cell	163.9	117.9	91.8	76.7	57.3	42.3	34.7	19.8	15.2	12.3	10.2	8.81	6.95	5.76	3.04
1.65V/cell	178.2	126.0	96.9	80.8	60.0	42.9	35.3	20.0	15.7	12.7	10.4	8.97	7.05	5.87	3.08
1.60V/cell	192.0	133.7	101.9	85.2	62.9	44.5	35.4	20.8	16.1	13.0	10.7	9.13	7.10	5.93	3.10


### Discharge Characteristics

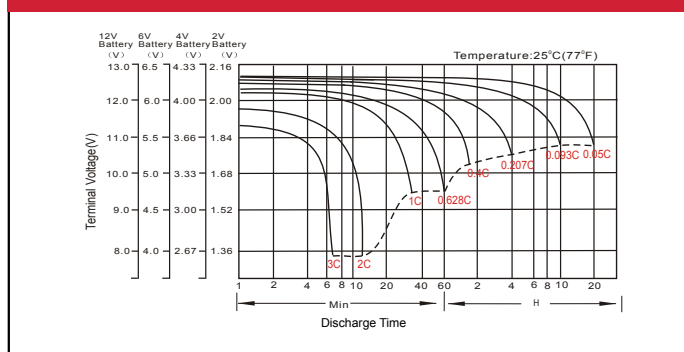


### Float Charging Characteristics

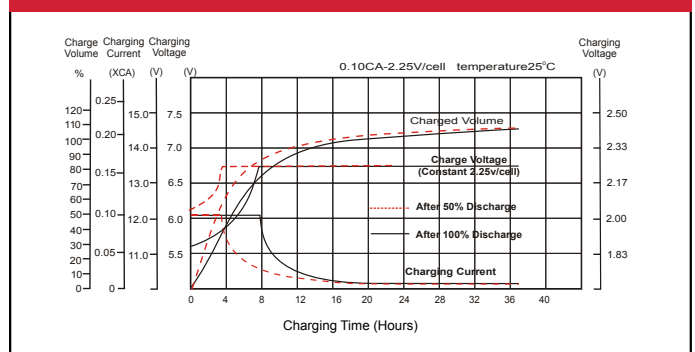


### Temperature Effects in Relation to Battery Capacity

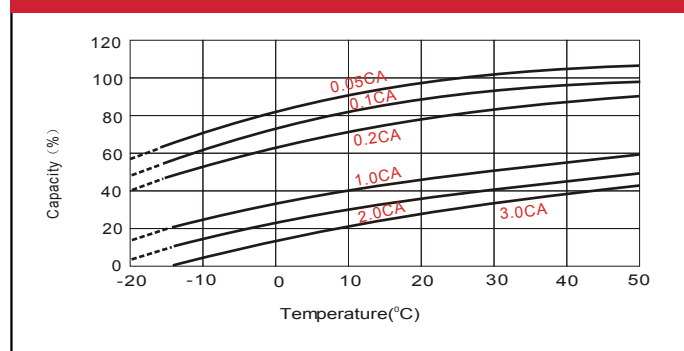


### Effect of Temperature on Long Term Float Life

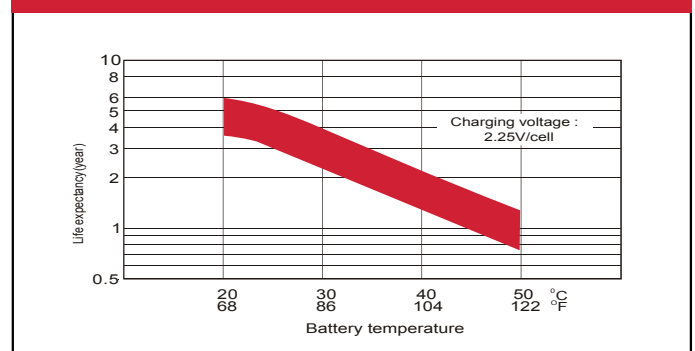

### Cycle Life in Relation to Depth of Discharge

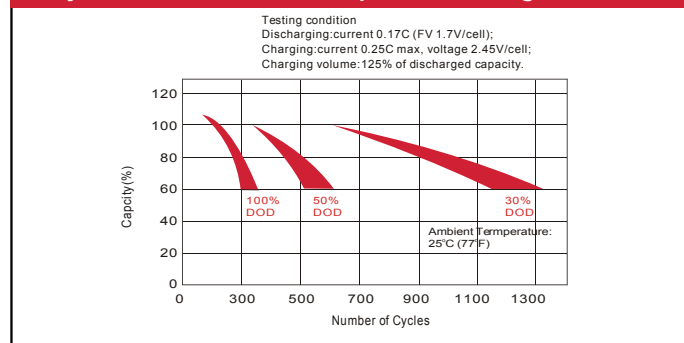

### Self Discharge Characteristics

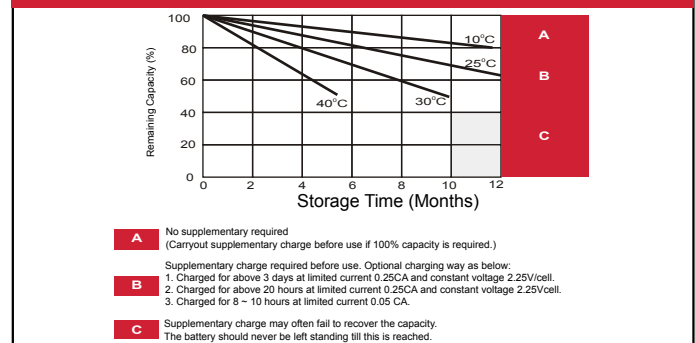

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE