

CFT150-12

12V 150AH

Front Terminal



CFT150-12



Physical Specification


Part Number	CFT150-12
Length	551 ± 2 mm
Width	110 ± 2 mm
Container Height	287 ± 2 mm
Total Height (with terminal)	289 ± 2 mm
Approx Weight	46.6 kg

Specifications

	Nominal Voltage	12V
	Nominal Capacity (10HR)	150AH
Terminal Type	Standard Terminal	T6
Container Material	Standard Option	ABS
	Flame Retardant Option (FR)	UL94-V0
Rated Capacity	20hr, 1.80V/cell, 25°C	165.0 AH/8.25A
	10hr, 1.80V/cell, 25°C	155.7 AH/15.57A
	5hr, 1.75V/cell, 25°C	130.5 AH/26.1A
	3hr, 1.75V/cell, 25°C	117.6AH/39.2A
	1hr, 1.60V/cell, 25°C	141.7 AH/28.34A
Max Discharge Current	1200 A (5s)	
Internal Resistance	Approx 3.0m Ω	
Discharge Characteristics	Operating Temp. Range	Discharge: -15 ~ 50°C
		Charge: 0 ~ 40°C
		Storage: -15 ~ 40°C
	Nominal Operating Temp. Range	25 ± 3°C
	Cycle Use	Initial Charging Current less than 45.0A Voltage 14.4V ~ 15.0V Temp. Coefficient -30mV/°C
Standby Use	No limit on Initial Charging Current Voltage 13.5V ~ 13.8V Temp. Coefficient -20mV/°C	
Capacity affect by Temperature	40°C	103%
	25°C	100%
	0°C	86%
Design Floating Life at 20°C	12+ Years	
Self Discharge	Canbat batteries may be stored for up to 6 months at 25°C(77°F) and then a refresh charge is required. For higher temperatures the time interval will be shorter.	

Dimensions

T6 Terminal

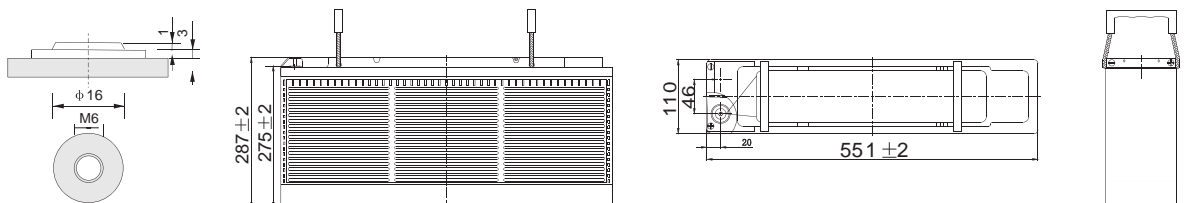

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE


Constant Current Discharge (Amperes) at 20°C

F.V/ Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	2609	2175	1866	1464	1135	923	550	396	318	263	229	17.85	14.89	7.89
1.80V/cell	2958	2424	2066	1602	1221	985	580	422	335	277	241	18.75	15.57	8.25
1.75V/cell	3246	2623	2204	1683	1268	1020	592	428	343	283	245	18.98	15.75	8.37
1.70V/cell	3472	2763	2293	1732	1297	1034	600	433	345	285	248	19.25	15.90	8.43
1.67V/cell	3593	2831	2341	1754	1302	1038	602	435	348	288	251	19.50	16.05	8.48
1.60V/cell	3777	2940	2445	1799	1336	1065	612	444	356	296	255	19.95	16.35	8.52


Constant Power Discharge (Watts) at 20°C

F.V/ Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	487.1	4102	3555	2819	2204	1798	1080	780	628	522	455	35.6	29.8	15.78
1.80V/cell	5458	4510	3878	3038	2353	1909	1131	826	658	546	476	37.3	31.1	16.48
1.75V/cell	5895	4822	4099	3166	2420	1968	1149	835	672	557	482	37.6	31.4	16.70
1.70V/cell	6165	5009	4232	3241	2467	1988	1162	842	675	558	487	38.1	31.7	16.81
1.67V/cell	6354	5112	4302	3276	2468	1992	1164	845	679	564	492	38.6	31.9	16.88
1.60V/cell	6495	5203	4431	3315	2505	2024	1173	857	690	576	499	39.4	32.5	16.95


Discharge Characteristics

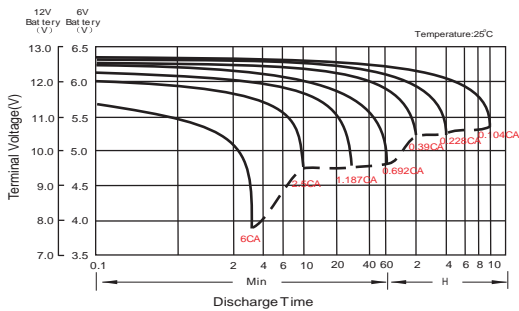


Float Charging Characteristics

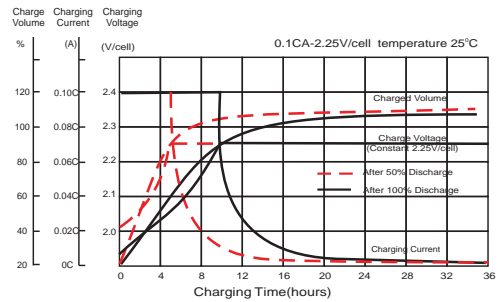


Temperature Effects in Relation to Battery Capacity

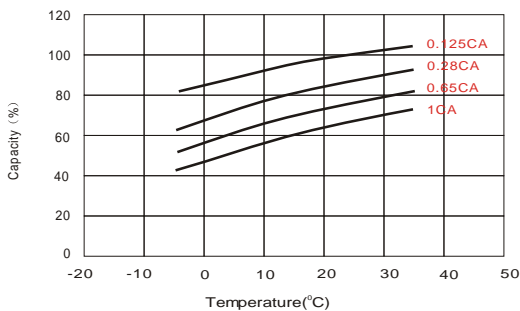

Effect of Temperature on Long Term Float Life

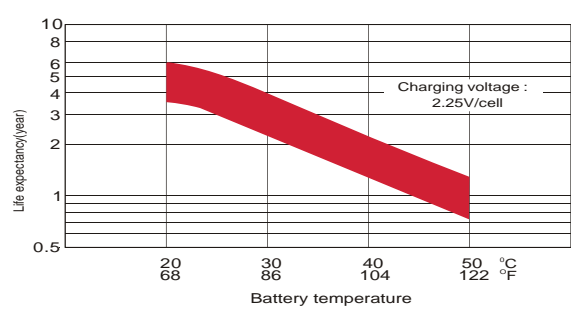

Self Discharge Characteristics

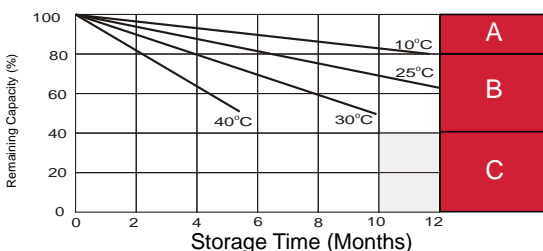

- A** No supplementary charge required (Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
 - 1.Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 - 2.Charged for above 20hours at limited current 0.25CA and constant voltage 2.45V/cell.
 - 3.Charged for 8~10hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this is reached.