

# CXL12-12

12V 12AH

Extended Life



## CXL12-12

Awaiting Image

## Physical Specification





Part Number:	<b>CXL12-12</b>
Length:	<b>151 ± 3 mm ( 5.95 inches)</b>
Width:	<b>98 ± 3 mm ( 3.86 inches)</b>
Container Height:	<b>95 ± 3 mm ( 3.74 inches)</b>
Total Height (with terminal):	<b>101 ± 3 mm ( 3.98 inches)</b>
Approx Weight:	<b>Approx 3.80 Kg (8.38 lbs)</b>

## Specifications

	Nominal Voltage	12V	
	Nominal Capacity (10HR)	12AH	
Terminal Type	Standard Terminal	T1	
	Optional Terminal	T2	
Container Material	Standard Option	ABS	
	Flame Retardant Option (FR)	ABS (UL94:VO)	
Rated Capacity	12.72 AH/0.636A	(20hr,1.80V/cell, 25°C / 77°F)	
	12.0 AH/1.20A	(10hr,1.80V/cell, 25°C / 77°F)	
	10.4 AH/2.08A	(5hr,1.75V/cell, 25°C / 77°F)	
	9.48 AH/3.16A	(3hr,1.75V/cell, 25°C / 77°F)	
	7.38 AH/7.38A	(1hr,1.60V/cell, 25°C / 77°F)	
Max Discharge Current	180A (5s)		
Internal Resistance	Approx 18.0mΩ		
Discharge Characteristics	Operating Temp. Range	Discharge: -15 ~ 50°C (5 ~ 122°F)	
		Charge: 0 ~ 40°C (32 ~ 104°F)	
		Storage: -15 ~ 40°C (5 ~ 104°F)	
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)	
	Cycle Use	Initial Charging Current less than 3.6A. Voltage 14.4V ~ 15.0V at 25°C (77°F) Temp. Coefficient -30mV/°C	
	Standby Use	No limit on Initial Charging Current Voltage 13.5V ~ 13.8V at 25°C (77°F) Temp. Coefficient -20mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%	
	25°C (77°F)	100%	
	0°C (32°F)	86%	
Design Floating Life at 20°C	15 Years		
Self Discharge	Canbat batteries may be stored for up to 6 months at 25°C(77°F) and then a refresh charge is required. For higher temperatures the time interval will be shorter.		

## Dimensions

### T1 Terminal



ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE


## Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	15.5	12.9	11.0	8.99	6.80	5.70	3.64	2.884	2.34	1.89	1.66	1.33	1.13	0.630
1.80V/cell	19.8	15.6	13.0	10.6	7.91	6.39	3.97	3.103	2.49	2.03	1.78	1.41	1.20	0.636
1.75V/cell	21.7	17.0	14.0	11.0	8.21	6.68	4.12	3.160	2.56	2.08	1.83	1.43	1.21	0.642
1.70V/cell	23.7	18.2	14.7	11.5	8.54	6.90	4.28	3.248	2.62	2.13	1.86	1.45	1.22	0.654
1.65V/cell	25.6	19.4	15.6	12.1	8.75	7.13	4.40	3.386	2.71	2.19	1.91	1.47	1.25	0.662
1.60V/cell	27.8	20.7	16.7	12.8	9.12	7.38	4.55	3.490	2.79	2.27	1.95	1.49	1.26	0.666


## Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	29.1	24.6	21.1	17.5	13.3	11.2	7.20	5.72	4.65	3.77	3.32	2.66	2.28	1.270
1.80V/cell	36.8	29.3	24.6	20.3	15.4	12.5	7.80	6.12	4.94	4.03	3.54	2.82	2.41	1.280
1.75V/cell	39.8	31.6	26.2	20.9	15.8	13.0	8.06	6.21	5.04	4.12	3.63	2.86	2.43	1.291
1.70V/cell	42.4	33.3	27.4	21.6	16.4	13.4	8.36	6.37	5.16	4.22	3.70	2.90	2.46	1.314
1.65V/cell	45.4	35.1	28.9	22.6	16.6	13.7	8.55	6.62	5.31	4.32	3.77	2.94	2.50	1.329
1.60V/cell	48.1	36.9	30.4	23.7	17.2	14.1	8.79	6.79	5.46	4.45	3.84	2.96	2.53	1.335


### Discharge Characteristics

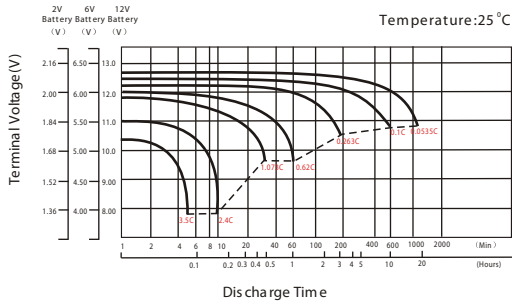


### Float Charging Characteristics

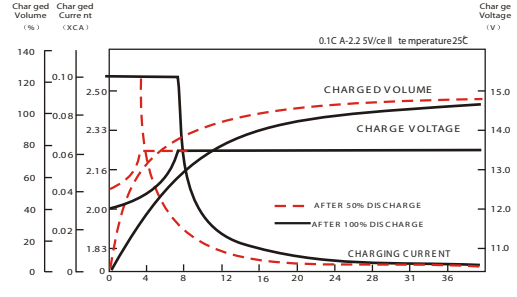


### Temperature Effects in Relation to Battery Capacity

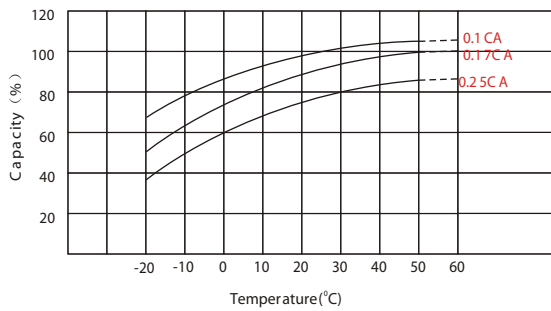

### Effect of Temperature on Long Term Float Life

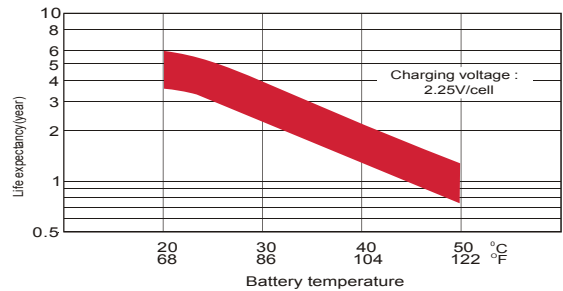

### Self Discharge Characteristics

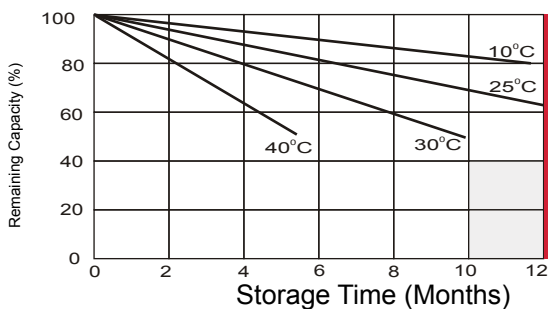

- A
 No supplementary required  
 (Carryout supplementary charge before use if 100% capacity is required.)
- B
 Supplementary charge required before use. Optional charging way as below:  
 1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.  
 2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.25V/cell.  
 3. Charged for 8 ~ 10 hours at limited current 0.05 CA.
- C
 Supplementary charge may often fail to recover the capacity.  
 The battery should never be left standing till this is reached.

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE