

# CXL 75-12

12V 75AH

Extended Life



## CXL75-12



## Physical Specification


Part Number:	<b>CXL75-12</b>
Length:	<b>259 ± 2 mm (10.20 inches)</b>
Width:	<b>168 ± 2 mm (6.61 inches)</b>
Container Height:	<b>208 ± 2 mm (8.19 inches)</b>
Total Height (with terminal):	<b>230 ± 2 mm (9.06 inches)</b>
Approx Weight:	<b>Approx 23.0kg (50.7lbs)</b>

## Specifications

	Normal Voltage	12V
	Normal Capacity (20HR)	75.0AH
Terminal Type	Standard Terminal	T6
	Optional Terminal	T14
Container Material	Standard Option	ABS
	Flame Retardant Option (FR)	ABS(UL94:VO)
Rated Capacity	80.2 AH/4.01A	(20hr, 1.80V/cell, 25°C / 77°F)
	75.0 AH/7.50A	(10hr, 1.80V/cell, 25°C / 77°F)
	65.5 AH/13.1A	(5hr, 1.75V/cell, 25°C / 77°F)
	58.5 AH/19.5A	(3hr, 1.75V/cell, 25°C / 77°F)
	46.5 AH/46.5A	(1hr, 1.60V/cell, 25°C / 77°F)
Max Discharge Current	900A (5s)	
Internal Resistance	Approx 6.6mΩ	
Discharge Characteristics	Operating Temp. Range	Discharge: -15 ~ 50°C (5 ~ 122°F)
		Charge: 0 ~ 40°C (5 ~ 104°F)
		Storage: -15 ~ 40°C (5 ~ 104°F)
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)
	Cycle Use	Initial Charging Current less than 22.5A. Voltage 14.4V ~ 15.0V at 25°C (77°F) Temp. Coefficient -30mV/°C
	Standby Use	No limit on Initial Charging Current Voltage 13.5V ~ 13.8V at 25°C (77°F) Temp. Coefficient -20mV/°C
Capacity affected by Temperature	40°C (104°F) 103%	
	25°C (77°F) 100%	
	0°C (32°F) 86%	
Design Floating Life at 20°C	15 Years	
Self Discharge	Canbat batteries may be stored for up to 6 months at 25°C(77°F) and then a refresh charge is required. For higher temperatures the time interval will be shorter.	

## Dimensions

### T14 Terminal

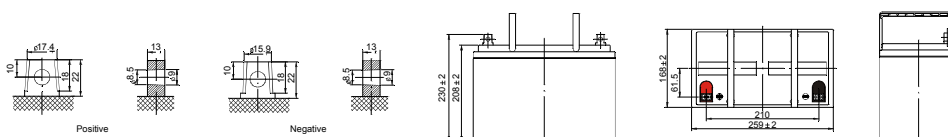

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE


### Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	10 min	15 min	20 min	30 min	45 min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	87.8	73.8	65.5	54.3	41.9	35.9	23.2	17.5	14.3	12.0	10.5	8.46	7.27	3.88
1.80V/cell	100.4	82.9	72.4	59.0	45.2	37.8	25.0	18.8	15.2	12.8	11.2	8.90	7.50	4.01
1.75V/cell	114.0	93.4	80.0	64.1	49.3	41.3	26.0	19.5	15.7	13.1	11.5	9.20	7.70	4.11
1.70V/cell	128.8	103.6	88.3	70.0	53.1	43.7	27.3	20.5	16.4	13.8	12.1	9.58	8.00	4.22
1.65V/cell	138.3	111.0	93.9	73.8	56.2	45.2	28.3	21.4	17.1	14.2	12.5	9.91	8.22	4.35
1.60V/cell	152.2	121.5	102.1	78.8	58.4	46.5	29.1	21.9	17.5	14.6	12.8	10.1	8.39	4.42


### Constant Power Discharge (Watts) at 25°C (77°F)

F.V/Time	10 min	15 min	20 min	30 min	45 min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	163.8	139.2	124.7	104.6	81.4	69.9	45.5	34.4	28.2	23.8	20.9	16.9	14.5	7.76
1.80V/cell	185.3	154.2	135.9	111.9	87.1	73.4	48.6	36.7	29.9	25.1	22.1	17.7	15.0	8.02
1.75V/cell	207.1	171.7	148.8	120.6	94.1	79.6	50.4	38.0	30.8	25.6	22.7	18.2	15.4	8.21
1.70V/cell	228.7	187.9	163.0	130.9	101.0	84.0	53.0	40.0	32.1	27.1	23.8	19.0	15.9	8.41
1.65V/cell	243.3	199.6	172.1	137.0	105.9	86.2	54.6	41.4	33.2	27.8	24.5	19.6	16.4	8.67
1.60V/cell	261.7	215.1	185.0	145.2	109.5	88.4	55.7	42.3	33.9	28.4	25.0	19.9	16.7	8.79


### Discharge Characteristics

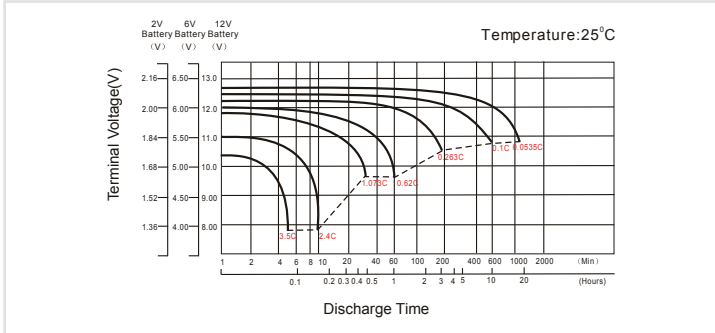


### Float Charging Characteristics

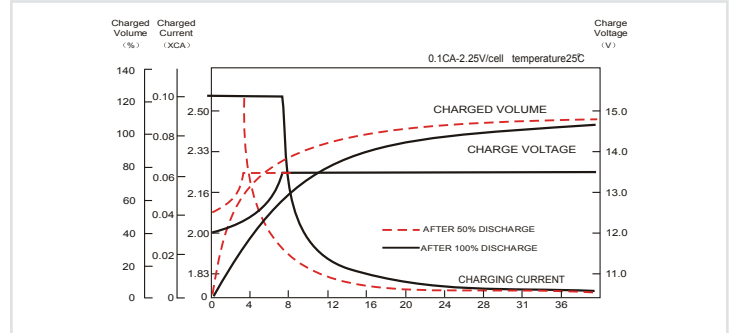


### Temperature Effects in Relation to Battery Capacity

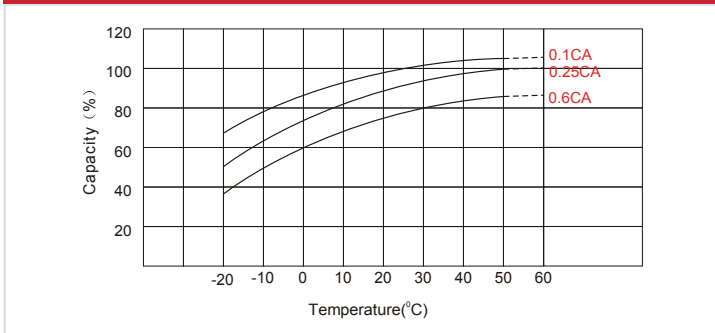

### Effect of Temperature on Long Term Float Life

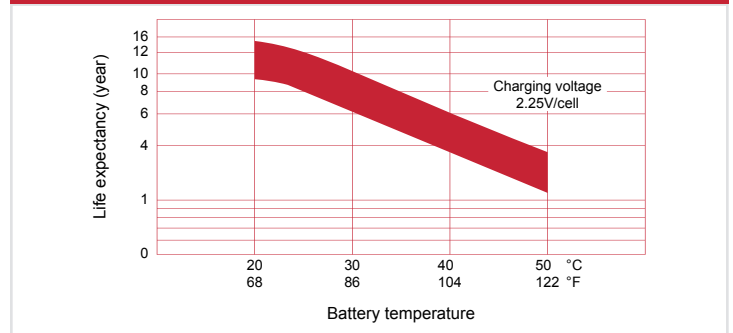

### Self Discharge Characteristics

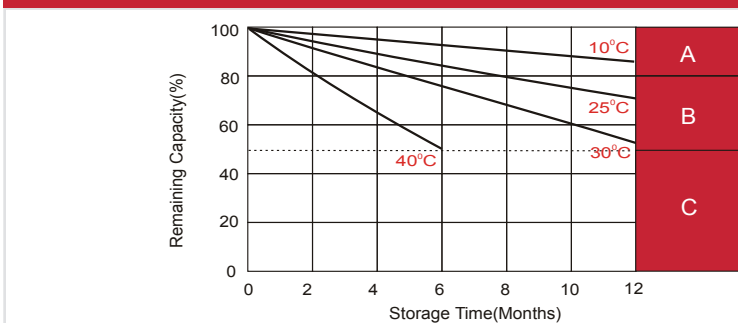

- A** No supplementary charge required  
(Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:  
1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.  
2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.  
3. Charged for 8-10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity.  
The battery should never be left standing till this is reached.

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE